



SPECIFICATION SHEET

Foamstream — M600H —

Introducing the Foamstream M600H, our first hybrid unit. Combining the efficiency of electric power with our industry leading, hyper efficient boilers, the M600H is suitable to mount on a wide range of municipal vehicles, including a large variety of UTVs.

With a flow rate of 1.59 gallons per minute, the M600H is particularly well-suited to smaller-scale jobs and harder to reach areas in inner-city and rural environments. The introduction of a battery unit has further reduced noise emissions, making this our quietest machine yet.

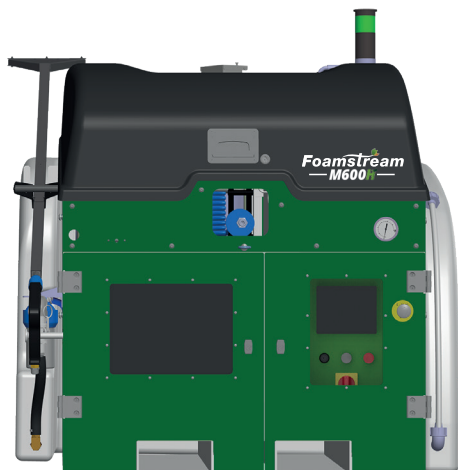

MACHINE MEASUREMENTS

| | |
|-------------------------|--|
| HEIGHT | 3' 11-1/4" |
| WIDTH | 3' 3-1/2" |
| WIDTH + INTEGRATED TANK | 4' 1-2/3" |
| DEPTH | 2' 7-1/2" |
| DEPTH + INTEGRATED TANK | 3' 7-3/4" |
| WEIGHT DRY UNIT | Small battery - 530 lb. Large battery - 607 lb. |
| WEIGHT WET UNIT | Small battery - 596 lb. Large battery - 673 lb. |
| BOILER | 48 kWh diesel powered, 230V 50 Hz with dual-stage pump, 200 bar 1/2" stainless steel coil |
| EMISSIONS CLASS | Electric |
| BATTERY | Small battery - Li-ion, 3032Wh (10.8V, 280.8 Ah). (Super Charger available) Large battery - Li-ion, 6064Wh (10.8V, 280.8 Ah). (Super Charger available) |
| BOILER EFFICIENCY | 93% |
| WAND WEIGHT | 5.5 lb. |
| HOSE LENGTH | 98 ft. |

OPERATING MEASUREMENTS

| | |
|--------------------------------|------------------------|
| INTERNAL OPERATING TEMPERATURE | 208 °F |
| OPERATING TEMPERATURE AT WAND | 208 °F |
| OVER-TEMPERATURE CUTOUT | 248 °F |
| WEED CONTROL WAND PRESSURE | 14.5 psi (atmospheric) |
| CLEANING WAND PRESSURE | 290 - 363 psi |
| FLOW RATE AT WAND (per minute) | 1.59 gal. |
| OPERATING NOISE LEVEL AT 1 m | < 60 dB |
| OPERATING NOISE LEVEL AT 5 m | < 55 dB |

CONSUMABLE MEASUREMENTS

| | |
|-----------------------------|---|
| BATTERY RUN TIME | Yeti 3000: 2.5 - 3 hours Yeti 6000x: 4.5 - 5 hours |
| BATTERY CHARGING TIME | Yeti 3000: 5 hours Yeti 6000x: 10 hours |
| DIESEL TANK CAPACITY | 9.25 gal. |
| PUMP OIL CAPACITY | 10 oz. |
| WATER TANK CAPACITY | 71 gal. |
| FOAM TANK CAPACITY | 4 gal. |
| FOAM JUG - GROSS WEIGHT | 57 lb. |
| FOAM CAPACITY WEIGHT | 55 lb. |
| FOAM STORAGE TEMP. REQUIRED | 41-104 °F |

OUTPUT PER HOUR : 100% COVERAGE

| | |
|----------------------------------|--------------|
| LOW VEGETATION DENSITY | 4521 sq. ft. |
| HIGH VEGETATION DENSITY | 3014 sq. ft. |
| TIME TAKEN TO TREAT 1 HA (HOURS) | < 24 |

